



**Features & benefits** ↓

- Compact
- Lightweight
- Spark-free; safe alternative for grinding
- Quick and reliable
- Usable in all positions
- Hardened blade that can be sharpened


**Standard supplied with** ↓

- Carrying/storage bag

Hand Pumps	page	140
Hydraulic Hoses	page	166
Pressure Gauges	page	171

**Steel Cable Cutters - Spring Return** ↓

model	HWC 16 A	HWC 25 A	HWC 32 A
art no	100.012.017	100.012.018	100.012.019
cutter type	steel cable	steel cable	steel cable
max. working pressure	bar/Mpa 720 / 72	720 / 72	720 / 72
max. jaw opening	mm 20	50	32
capacity Ø steel cable 6x7	mm 16	25	32
capacity Ø steel cable 6x12	mm 20	30	32
capacity Ø steel cable 6x19	mm 20	30	32
capacity Ø solid steel	mm 13	19	25
capacity Ø reinforcing steel	mm 13	19	25
capacity Ø ground cable	mm 18	50	32
capacity	kN/t 52 / 5.3	146 / 14.9	249 / 25.4
required oil content (effective)	cc 49	106	135
return type	spring	spring	spring
weight, ready for use	kg 2.0	8.4	8.9
temperature range	°C -20 + 55	-20 + 55	-20 + 55
dimensions (AxBxC)	mm 242 x 54 x 75	425 x 91 x 210	340 x 90 x 156

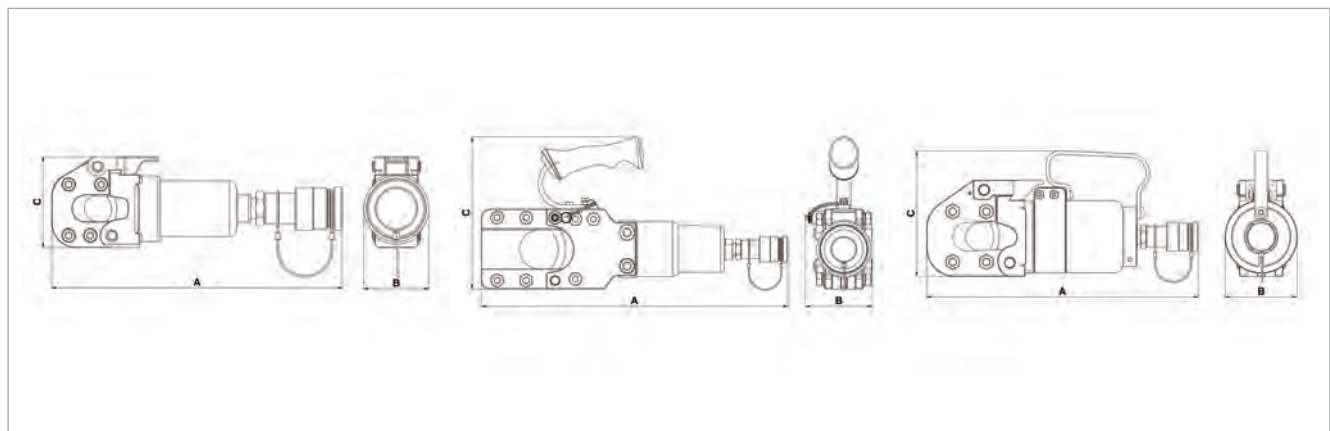



**Features & benefits** ↓

- Compact
- Lightweight
- Spark-free; safe alternative for grinding
- Quick and reliable
- Usable in all positions
- Hardened blade that can be sharpened



**Standard supplied with** ↓

- Carrying/storage bag

Hydraulic Pumps	page	139
Hydraulic Hoses	page	166
Pressure Gauges	page	171

**Power Cable Cutters - Spring Return** ↓

model	HCC 85 A	HCC 100 A
art no	100.012.020	100.012.021
cutter type	power cable	power cable
max. working pressure	bar/Mpa 720 / 72	720 / 72
max. jaw opening	mm 85	100
capacity Ø ground cable	mm 50	75
capacity Ø telephone cable	mm 85	100
capacity	kN/t 49 / 5	87 / 8.9
required oil content (effective)	cc 65	140
return type	spring	spring
weight, ready for use	kg 6.8	12.7
temperature range	°C -20 + 55	-20 + 55
dimensions (AxBxC)	mm 485 x 76 x 245	545 x 85 x 263

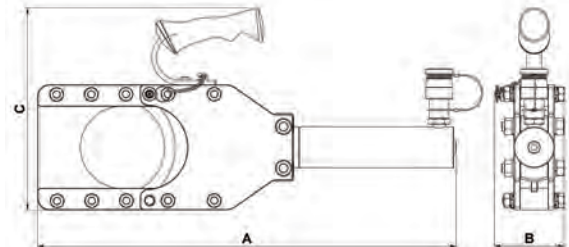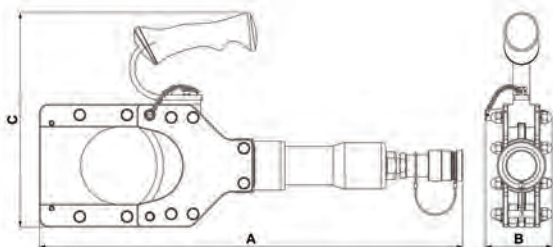



HCC 150



**Features & benefits**



- Compact
- Lightweight
- Spark-free; safe alternative for grinding
- Quick and reliable
- Usable in all positions
- Hardened blade that can be sharpened

Hydraulic Pumps  
Hydraulic Hoses  
Pressure Gauges

page 139  
page 166  
page 171

**Power Cable Cutters - Hydraulic Return**



<b>model</b>	<b>HCC 150</b>	
art no	100.522.150	
cutter type	power cable	
max. working pressure	bar/Mpa	720 / 72
max. jaw opening	mm	150
capacity Ø ground cable	mm	140
capacity Ø telephone cable	mm	150
capacity	kN/t	203.6 / 20.8
required oil content (effective)	cc	452
return type	hydraulic	
weight, ready for use	kg	24.9

